




FLO-MASTER
PUMPS AUSTRALIA

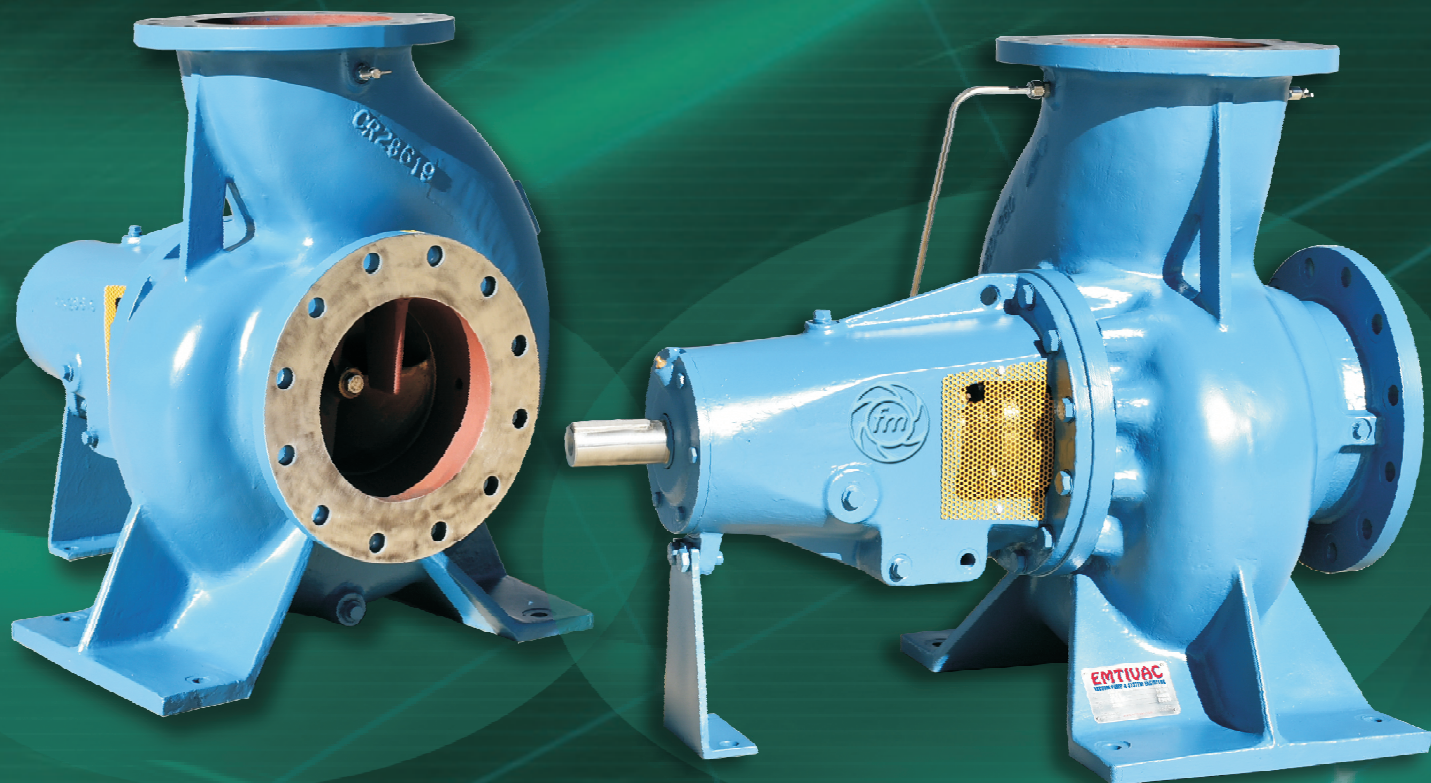

**ES/ESL - END SUCTION PUMPS
SINGLE & DOUBLE SUCTION
HORIZONTAL EXECUTION
SINGLE STAGE**

EMTIVAC



FLO-MASTER

PUMPS AUSTRALIA



FLO-MASTER ES / ESL

Applications in the following segments:

- General Industrial and Process
- Irrigation
- Water Supply & Treatment
- Power Generation
- Fire Protection
- Mine Dewatering
- Desalination.

ES/ESL hydraulic design has been made of proven hydraulics from our established split case pumps to build this range. The hydraulic performance is characterized by stable head capacity curve, high efficiency and low NPSHr.

ES/ESL high head pumps incorporate double volute design to reduce radial load and to improve seal/bearing lives. Combination of cylindrical roller and BECB matched pair angular contact bearings ensures high bearing life under all load conditions.

ES/ESL pumps provide an optimum coverage of duties for flow beyond ISO 2858 end suction pumps.

Low NPSHr Ensures high suction lift capabilities and protects the pump from cavitation erosion without compromising on efficiency or smooth operation.

Casing Wear Rings are fitted to both the casing and the back covers to minimise abrasive and corrosive wear, addition impeller wear rings can also be fitted for some applications.

High Strength Shaft is designed to cover maximum loadings and ensure minimum deflection and improved bearing life. Shafts are protected by shaft sleeves in packed gland pumps.

Stuffing Box can accommodate both soft packing and mechanical seals, both single and double mechanical seals are available as well as various seal piping plans.




FLO-MASTER
PUMPS AUSTRALIA

RANGE CHART OF ISO 2858 END SUCTION PUMPS-SERIES ES

SINGLE STAGE END SUCTION PUMPS WITH SINGLE ENTRY IMPELLERS

RANGE CHART 50Hz, 2Pole

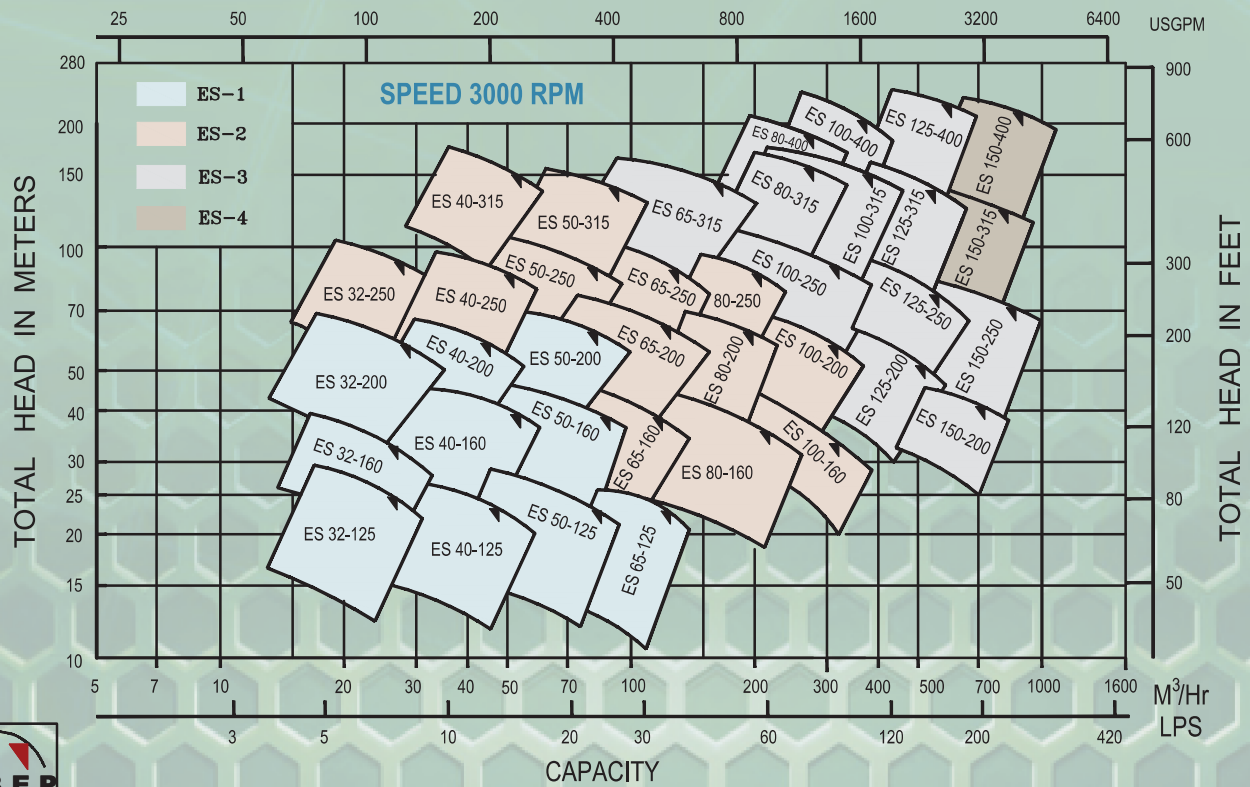


FLO-MASTER
PUMPS AUSTRALIA

RANGE CHART OF ISO 2858 END SUCTION PUMPS-SERIES ES

SINGLE STAGE END SUCTION PUMPS WITH SINGLE ENTRY IMPELLERS

RANGE CHART 50Hz, 4Pole

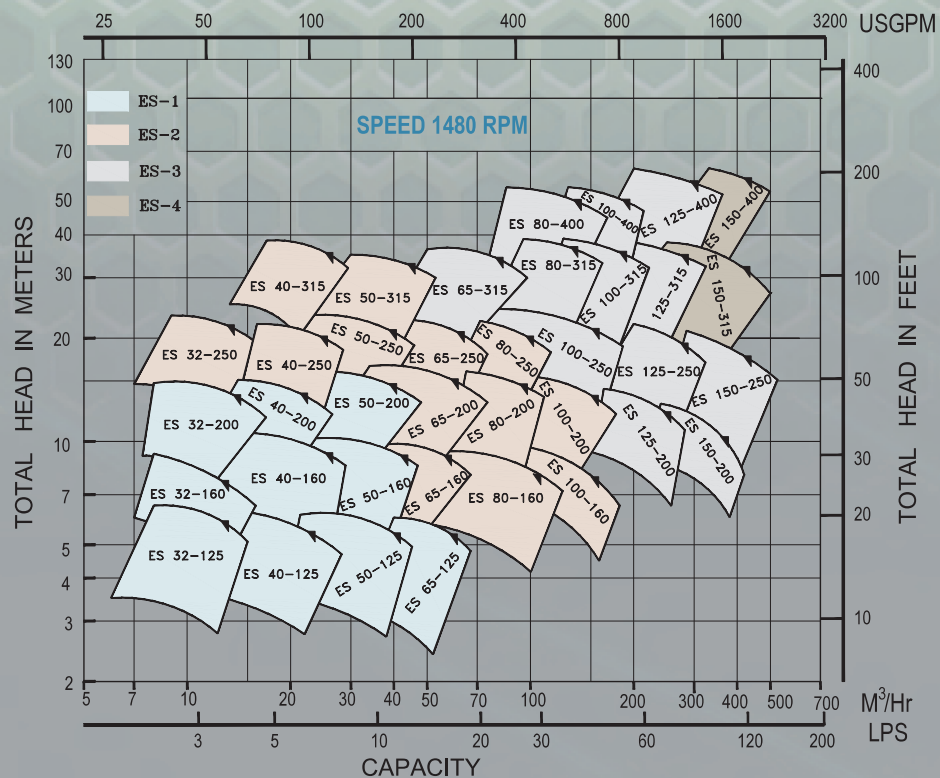




FLO-MASTER
PUMPS AUSTRALIA

RANGE CHART OF END SUCTION PUMPS-SERIES ESL

SINGLE STAGE END SUCTION PUMPS WITH SINGLE ENTRY IMPELLERS

RANGE CHART 50Hz, 4Pole

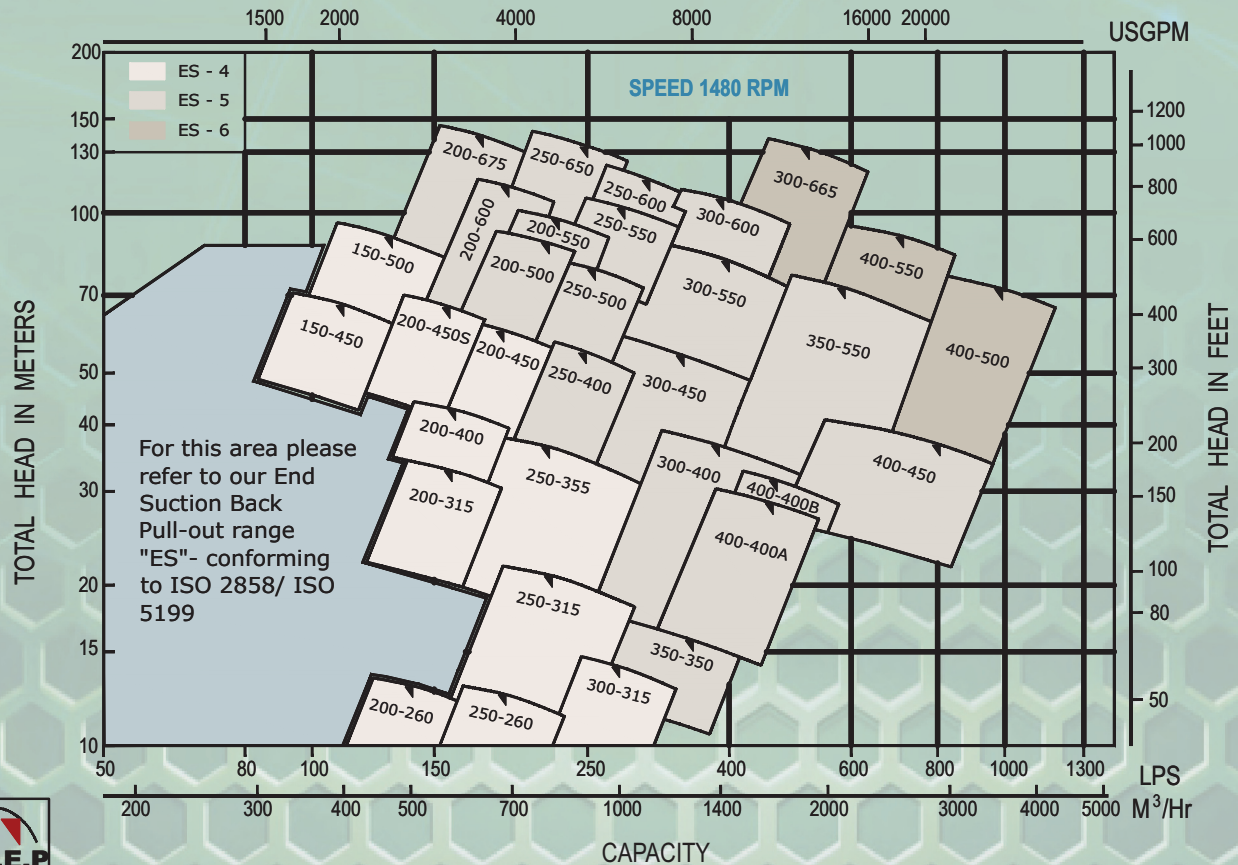


FLO-MASTER
PUMPS AUSTRALIA

RANGE CHART OF END SUCTION PUMPS-SERIES ESL

SINGLE STAGE END SUCTION PUMPS WITH SINGLE ENTRY IMPELLERS

RANGE CHART 50Hz, 6Pole

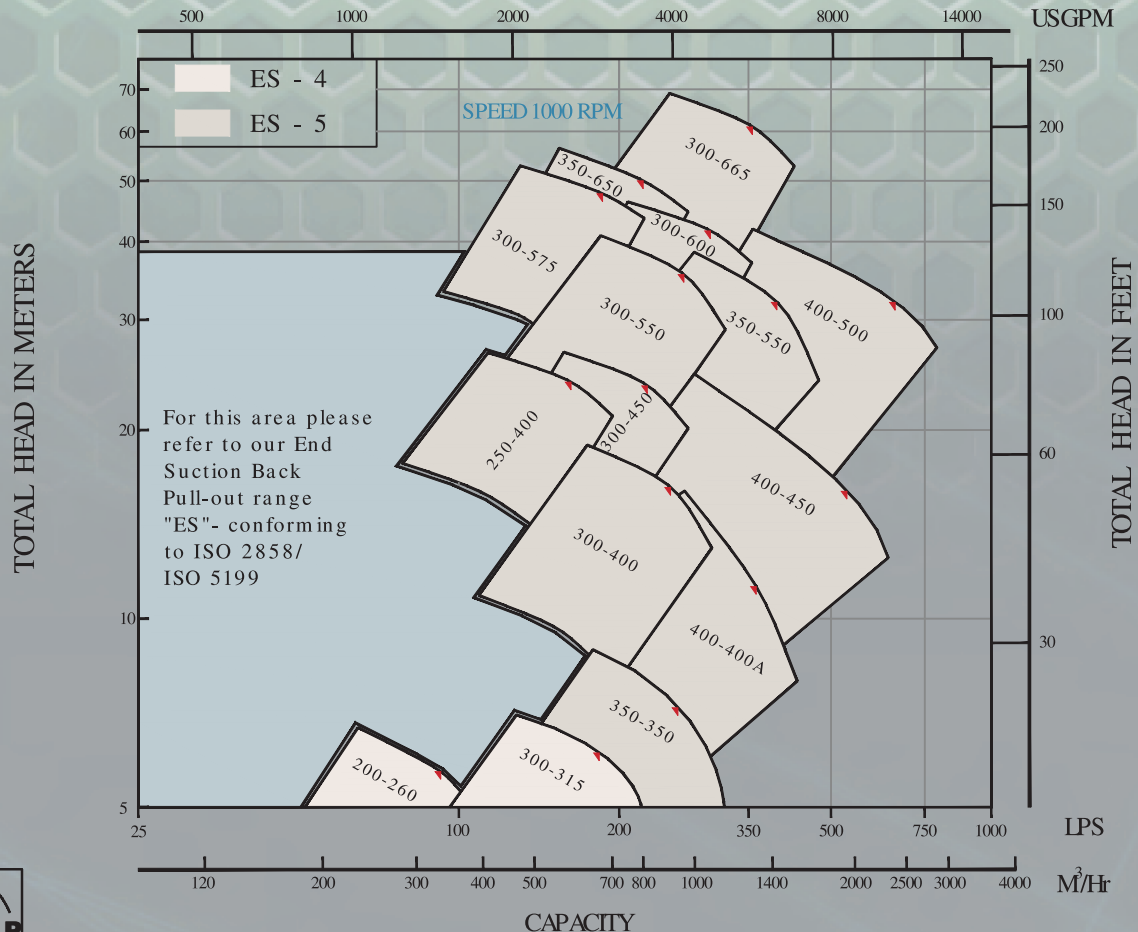



FLO-MASTER
PUMPS AUSTRALIA

MAJOR FEATURES OF PUMP CONSTRUCTION

CASING THICKNESS

Long working life of pump casing is ensured by strength analysis and high integrity castings. Liberal corrosion allowance is also provided.

BACK PULL-OUT DESIGN

This feature allows easy removal of the rotating element without disturbing the pipe work, electric motor or pump volute casing and thus reduces downtime when performing routine maintenance.

IMPELLER NUT

Positively locks impeller to the shaft. Prevents "back off" during accidental reverse motor rotation.

BEARING

Heavy duty angular contact (BECB series) and cylindrical roller (NU series) bearings are used at the drive end and the non-drive ends respectively, to carry the radial and axial loads imposed on the impeller and also the load due to coupling movement. Bearing system is designed to keep the shaft axial movement and lateral deflection within acceptable limits.

BEARING LUBRICATION

Grease nipples are provided for bearing lubrication. Bearing housings are suitable for oil-lubricated bearings as well.

KEY AND KEYWAY

The key in the shaft is liberally designed to transmit power from driver (motor / engine) to the pump with the help of a flexible coupling coupled to the driver shaft.

Shaft Sleeve

The pump shaft is fitted with a renewable shaft sleeve to minimize shaft wear. The sleeve is sealed at the impeller to prevent ingress of pumped liquid on the shaft. An additional function of the shaft sleeve is to increase the stiffness of the rotating assembly, thereby reducing shaft deflection at the stuffing box. This has beneficial effects on seal and bearing lives.

CASE WEARING RING

The pump casing and back covers are fitted with replaceable wear ring to minimize abrasive and corrosive wear to the casing while minimizing leakage losses. Additionally, Impeller rings are provided as optional extras for demanding applications. Galling properties are taken into consideration while selecting the wear ring materials and their clearances at the rotating elements.

DOUBLE VOLUTE CASING

All high head pumps are provided with double volute casing to minimize radial load. This feature allows wider operating range and extended bearing and seal lives.

SUPPORT FOOT


This sturdy unit minimizes shaft displacement in the coupling area.

OIL SEAL


Oil seals are used to prevent contamination of lubricant in bearing area.

SHAFT

The shafts are sturdy and designed with high stiffness (low L/I ratio). The design ensures deflection of less than 0.05 mm at the seal areas under normal running conditions. Shaft is dimensioned to ensure bearing life of more than 40,000 operating hours when run in the preferred operating region. All shafts are protected by replaceable sleeves in stainless steel or copper alloys.

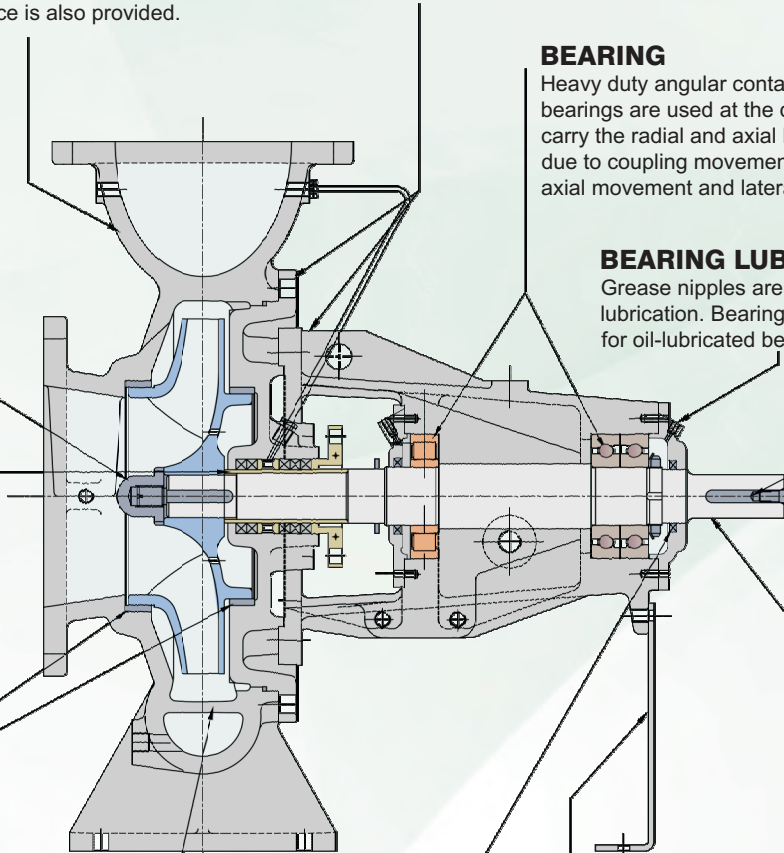


CROSS-SECTION OF ESL END SUCTION PUMP (PACKED GLAND FITTED)

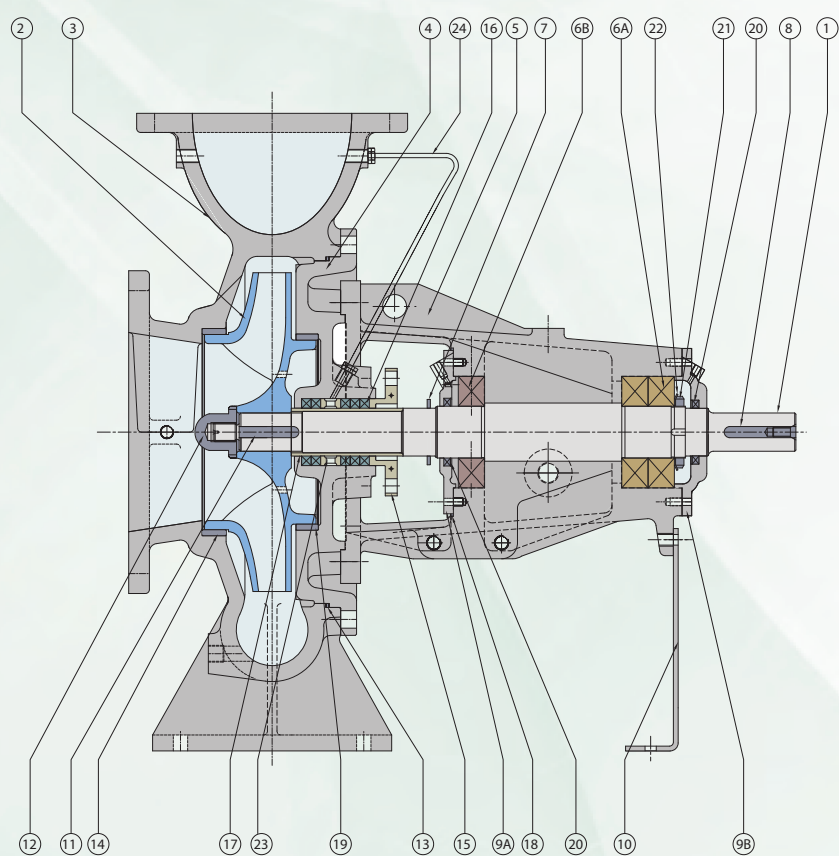

Sl. No.	Description	Qty
1	Shaft	1
2	Impeller	1
3	Casing	1
4	Back Cover	1
5	Bearing Bracket	1
6A	Angular Contact Ball Brg. (Outer) BECB XXXX	2
6B	Cylindrical Roller Brg. (Inner) NU XXX	1
7	Water Thrower	1
8	Coupling Key	1
9A	Bearing End Cover (N.D.E)	1
9B	Bearing End Cover (D.E)	1
10	Support Foot	1
11	Impeller Key	1
12	Impeller Nose Cap	1
13	'O' Ring For Casing	1
14	Casing Wear Ring (Front)	1
15	Split Gland	1
16	Gland Packing	1
17	Shaft Sleeve	1
18	'O' Ring For Back Cover	1
19	Casing Wear Ring (Back)	1
20	Oil Seal	1+1
21	Bearing Lock Nut	1
22	Bearing Lock Washer	1
23	Lantern Ring	1
24	Seal Flushing line	1

CROSS-SECTION OF ESL END SUCTION PUMP (MECHANICAL SEAL)

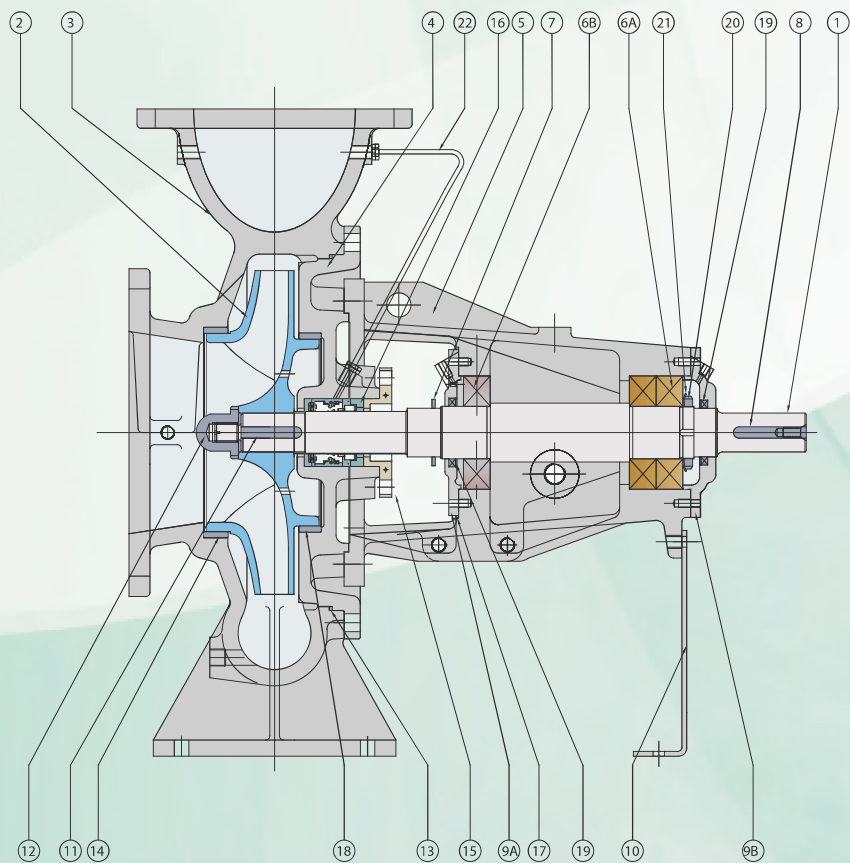

Sl. No.	Description	Qty
1	Shaft	1
2	Impeller	1
3	Casing	1
4	Back Cover	1
5	Bearing Bracket	1
6A	Angular Contact Ball Brg. (Outer) BECB XXXX	2
6B	Cylindrical Roller Brg. (Inner) NU XXX	1
7	Water Thrower	1
8	Coupling Key	1
9A	Bearing End Cover (N.D.E)	1
9B	Bearing End Cover (D.E)	1
10	Support Foot	1
11	Impeller Key	1
12	Impeller Nose Cap	1
13	'O' Ring For Casing	1
14	Casing Wear Ring (Front)	1
15	Gland Plate	1
16	Mechanical Seal	1
17	'O' Ring For Back Cover	1
18	Casing Wear Ring (Back)	1
19	Oil Seal	1+1
20	Bearing Lock Nut	1
21	Bearing Lock Washer	1
22	Seal Flushing Line	1



FLO-MASTER
PUMPS AUSTRALIA



FLO-MASTER

PUMPS AUSTRALIA


MATERIAL EQUIVALENCE CHART

Part No	Part Name	Standard Fitted Pump	British Standard	ASTM Standard	Din Standard	Din Material Number	Din Specification
1	Casing	Cast Iron	BS1452 Grade 260	A48 Class 35	GG25	0.6025	DIN1691
2	Impeller	Bronze	BS1400 LG2	B584 C83600	CuSn5Zn5Pb5-C	2.1096.01	DIN 1705
3	Front Casing Wear Ring	Bronze	BS1400 LB2	B584 C93700	CuSn10Pb10-C	2.1182.03	DIN1705
4	Back Casing Wear Ring	Bronze	BS1400 LB2	B584 C93700	CuSn10Pb10-C	2.1182.03	DIN1705
5	Shaft	Stainless Steel	BS970 410 S21	A276 Type 410	X 10 Cr 13	1.4006	DIN1705
6	Back Cover	Cast Iron	BS1452 Gr 260	A48 Class 35	GG25	0.6025	DIN1691
7	Bearing Bracket	Cast Iron	BS1452 Gr 260	A48 Class 35	GG25	0.6025	DIN1691
8	Baering End Cover Outer	Cast Iron	BS1452 Gr 260	A48 Class 35	GG25	0.6025	DIN1691
9	Bearing End Cover Inner	Cast Iron	BS1452 Gr 260	A48 Class 35	GG25	0.6025	DIN 1691
10	Impeller Nose Cap	Stainless Steel	BS970 410 S21	A276 Type 410	X 10 Cr 13	1.4006	DIN1705
11	Gland	Bronze	BS1400 LG2	B584 C83600	G -CuSn 5 ZnPb	2.1096.01	DIN1705
12	Lantern Ring	Bronze	BS1400 LG2	B584 C83600	G-CuSn 5 ZnPb	2.1096.01	DIN1705
13	Impeller Key	Stainless Steel	BS970 410 S21	A276 Type 410	X 10 Cr 13	1.4006	DIN1705
14	Coupling Key	Stainless Steel	BS970 410 S21	A276 Type 410	X 10 Cr 13	1.4006	DIN1705
15	Shaft Sleeve	Bronze	BS1400 CT1	B427 C 90700	G-CuSn10	2.1050.01	DIN 1705
16	Bearing Spacer (inner)	Mild Steel	BS 970 080M40	EN8	C45	1.1191	DIN1705
17	Bearing Spacer (outer)	Mild Steel	BS 970 080M40	EN8	C45	1.1191	DIN1705
18	Gland Packing	Graphite Impregnated					
19	Mechanical Seal	AES or Equivalent					
20	Bearing	SKF/FAG					
21	Bearing Lock Nut	SKF/FAG					
22	Bearing Locking Washer	SKF/FAG					
23	Water Thrower	Neoprene Rubber					
24	O-ring	NITRILE					
25	Gasket	Vegetable Fibre Based 0.5 mm Sheet					
26	Bearing Oil Seal	SKF					
27	Seal piping	3/8" dia Copper Pipe					
28	Seal Flow Control Device	Ball Valve					
29	Support Foot	FABRICATED STEEL					

OPTIONAL CONSTRUCTION

PART NO	PART NAME	SPECIAL MATERIAL	BRITISH STANDARD	ASTM STANDARD	DIN STANDARD	DIN MATERIAL NUMBER	DIN SPECIFICATION
1	Casing	Ductile Iron	BS 2789 Gr.500/7	A536, 60-45-12	GGG50	0.705	DIN 1693
		Cast Steel	BS 3100 Gr.A1	A216 WCB	GS- C25	1.0619	DIN17245
		Stainless Steel	BS3100-316 C16	ASTM A743 Gr.CF-8M	GX6CrNiMo18 10	1.4408	
		Ni Resist	BS3468 L-NiCuCr 15 6 2	A436 Type 1	GGL -NiCuCr15 6 2	0.6655	
2	Impeller	Cast Iron	BS1452 Gr260	A48 Class 35	GG25	0.6025	DIN1691
		Zinc Free Bronze	BS 1400 CT1	B427 C90700	G-CuSn10	2.1050.01	DIN 1705
		Stainless Steel	BS3100-316 C16	ASTM A743 Gr.CF-8M	GX6CrNiMo18 10	1.4408	
			BS3100-410 C21	ASTM A743 Gr.CA 15	G-X 8 CrNi 13	1.4008	
3	Shaft	HT Steel	BS970-708 M40	A322 Gr4140	42 CrMo4	1.7225	DIN 17200
		Stainless Steel	BS970 316 S 16	ASTM A 276 Type316	X5CrNiMo17 12 2	1.4401	
			BS970-304 S15	ASTM A 276 Type304	X5 CrNi18 10	1.4301	

GENERAL ARRANGEMENT DRAWING OF ES PUMP

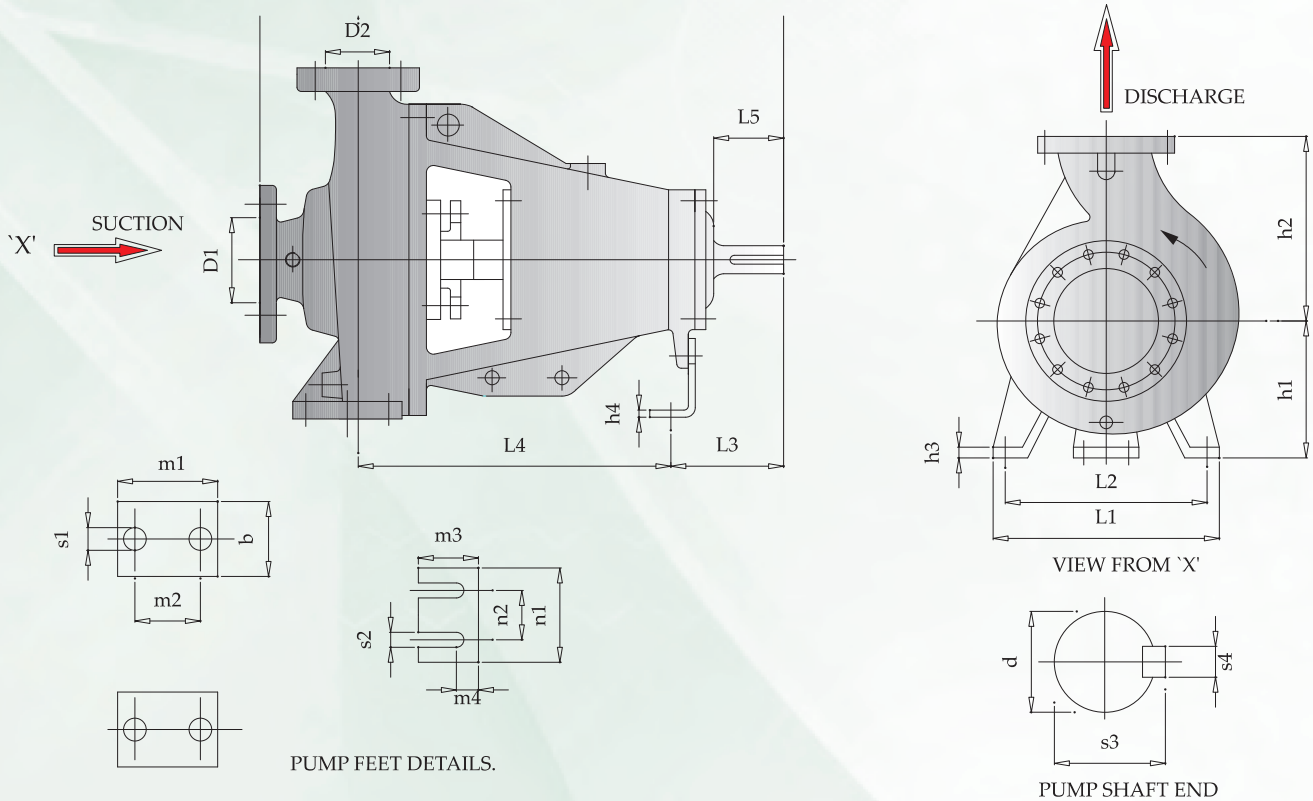


ES PUMP DIMENSIONS

Pump Size	Pump Dimensions						Mounting Dimensions																Shaft Dimensions				Weight (kg)
	D1	D2	a	f	h1	h2	b	h3	h4	m4	m1	m2	m3	L1	L2	n1	n2	s1	s2	L3	L4	d	L5	s3	s4		
ES 50x32-125	50	32	80	385	112	140	50	15	8	42	100	70	65	190	140	155	110	14	14	100	285	24	50	26.9	8	36	
ES 50x32-160	50	32	80	385	132	160	50	15	8	42	100	70	65	240	190	155	110	14	14	100	285	24	50	26.9	8	34	
ES 50x32-200	50	32	80	385	160	180	50	15	8	43	100	70	65	240	190	155	110	14	14	100	285	24	50	26.9	8	44	
ES 50x32-250	50	32	100	500	180	225	65	18	8	39	125	95	65	320	250	155	110	14	14	130	370	32	80	35.3	10	68	
ES 65x40-125	65	40	80	385	112	140	50	15	8	42	100	70	65	210	160	155	110	14	14	100	285	24	50	26.9	8	38	
ES 65x40-160	65	40	80	385	132	160	50	15	8	42	100	70	65	240	190	155	110	14	14	100	285	24	50	26.9	8	38	
ES 65x40-200	65	40	100	385	160	180	50	15	8	43	100	70	65	265	212	155	110	14	14	100	285	24	50	26.9	8	49	
ES 65x40-250	65	40	100	500	180	225	65	18	8	39	125	95	65	320	250	155	110	14	14	130	370	32	80	35.3	10	73	
ES 65x40-315	65	40	125	500	200	250	65	18	12	39	125	95	65	345	280	155	110	14	14	130	370	32	80	35.3	10	104	
ES 80x50-125	80	50	100	385	132	160	50	15	8	42	100	70	65	240	190	155	110	14	14	100	285	24	50	26.9	8	40	
ES 80x50-160	80	50	100	385	160	180	50	15	8	43	100	70	65	265	212	155	110	14	14	100	285	24	50	26.9	8	42	
ES 80x50-200	80	50	100	385	160	200	50	15	8	43	100	70	65	265	212	155	110	14	14	100	285	24	50	26.9	8	47	
ES 80x50-250	80	50	125	500	180	225	65	18	8	39	125	95	65	320	250	155	110	14	14	130	370	32	50	35.3	10	72	
ES 80x50-315	80	50	125	500	225	280	65	18	12	42	125	95	65	345	280	155	110	14	14	130	370	32	80	35.3	10	108	
ES 100x65-125	100	65	100	385	160	180	65	18	8	43	125	95	65	280	212	155	110	14	14	100	285	24	80	26.9	8	49	
ES 100x65-160	100	65	100	500	160	200	65	18	8	39	125	95	65	280	212	155	110	14	14	130	370	32	50	35.3	10	70	
ES 100x65-200	100	65	100	500	180	225	65	18	8	43	125	95	65	320	250	155	110	14	14	130	370	32	80	35.3	10	61	
ES 100x65-250	100	65	125	500	200	250	80	19	12	40	160	120	65	360	280	155	110	18	14	130	370	32	80	35.3	10	89	
ES 100x65-315	100	65	125	530	225	280	80	19	12	39	160	120	65	400	315	155	110	18	14	160	370	42	80	45.1	12	126	
ES 125x80-160	125	80	125	500	180	225	65	18	8	39	125	95	65	320	250	155	110	14	14	130	370	32	110	35.3	10	89	
ES 125x80-200	125	80	125	500	180	250	65	18	8	39	125	95	65	345	280	155	110	14	14	130	370	32	80	35.3	10	92	
ES 125x80-250	125	80	125	500	225	280	80	19	12	42	160	120	65	400	315	155	110	18	14	130	370	32	80	35.3	10	106	
ES 125x80-315	125	80	125	530	250	315	80	19	12	39	160	120	65	400	315	155	110	18	14	160	370	42	80	45.1	12	132	
ES 125x80-400	125	80	125	530	280	355	80	20	12	39	160	120	65	435	355	155	110	18	14	160	370	42	110	45.1	12	162	
ES 125x100-160	125	100	125	500	200	280	80	19	12	40	160	120	65	360	280	155	110	18	14	130	370	32	110	35.3	10	105	
ES 125x100-200	125	100	125	500	200	280	80	18	12	40	160	120	65	360	280	155	110	18	14	130	370	32	80	35.3	10	108	
ES 125x100-250	125	100	140	530	225	280	80	20	12	39	160	120	65	400	315	155	110	18	14	160	370	42	80	45.1	12	132	
ES 125x100-315	125	100	140	530	250	315	80	18	12	39	160	120	65	400	315	155	110	18	14	160	370	42	110	45.1	12	142	
ES 125x100-400	125	100	140	530	280	355	100	20	12	39	200	150	65	500	400	155	110	22	14	160	370	42	110	45.1	12	178	
ES 150x125-200	150	125	140	530	250	315	80	20	12	39	160	120	65	400	315	155	110	18	14	160	370	42	110	45.1	12	136	
ES 150x125-250	150	125	140	530	250	355	80	18	12	39	160	120	65	400	315	155	110	18	14	160	370	42	110	45.1	12	157	
ES 150x125-315	150	125	140	530	280	400	100	20	12	39	200	150	65	500	400	155	110	22	14	160	370	42	110	45.1	12	156	
ES 150x125-400	150	125	140	530	315	400	100	20	12	39	200	150	65	500	400	155	110	22	14	160	370	42	110	45.1	12	193	
ES 200x150-200	200	150	160	530	280	400	100	20	12	39	200	150	65	550	450	155	110	22	14	160	370	42	110	45.1	12	183	
ES 200x150-250	200	150	160	530	280	375	100	20	12	39	200	150	65	500	400	155	110	22	14	160	370	42	110	45.1	12	192	
ES 200x150-315	200	150	160	670	315	400	100	20	15	38	200	150	68	550	450	210	140	22	20	170	500	48	110	51.5	14	254	
ES 200x150-400	200	150	160	670	315	450	100	20	15	38	200	150	68	550	450	210	140	22	20	170	570	48	110	51.5	14	280	
ES 200x150-500	200	150	180	625	375	500	100	25	15	40	200	150	70	550	450	210	140	24	14	165	455	65	110	69.9	20	465	
ES 250x200-315	250	200	200	625	355	450	100	25	15	45	200	150	75	550	450	250	140	24	14	170	455	48	110	51.5	14	335	
ES 250x200-400	250	200	180	625	355	500	100	25	15	45	200	150	75	550	450	250	140	24	14	170	455	48	110	51.5	14	425	
ES 250x200-500	250	200	200	700	400	550	100	25	15	45	200	150	75	650	550	250	140	27	14	200	500	65	140	69.9	20	525	
ES 300x250-315	300	250	250	625	400	550	120	25	15	45	240	180	75	680	580	250	140	27	14	170	455	48	110	51.5	14	350	
ES 300x250-400	300	250	200	700	375	550	120	30	15	45	240	180	75	600	500	250	140	27	14	200	500	65	140	69.9	20	475	
ES 300x250-500	300	250	200	700	425	620	120	30	15	45	240	180	75	700	600	250	140	27	14	200	500	65	140	69.9	20	550	



FLO-MASTER
PUMPS AUSTRALIA

GENERAL ARRANGEMENT DRAWING OF LARGE END SUCTION PUMP

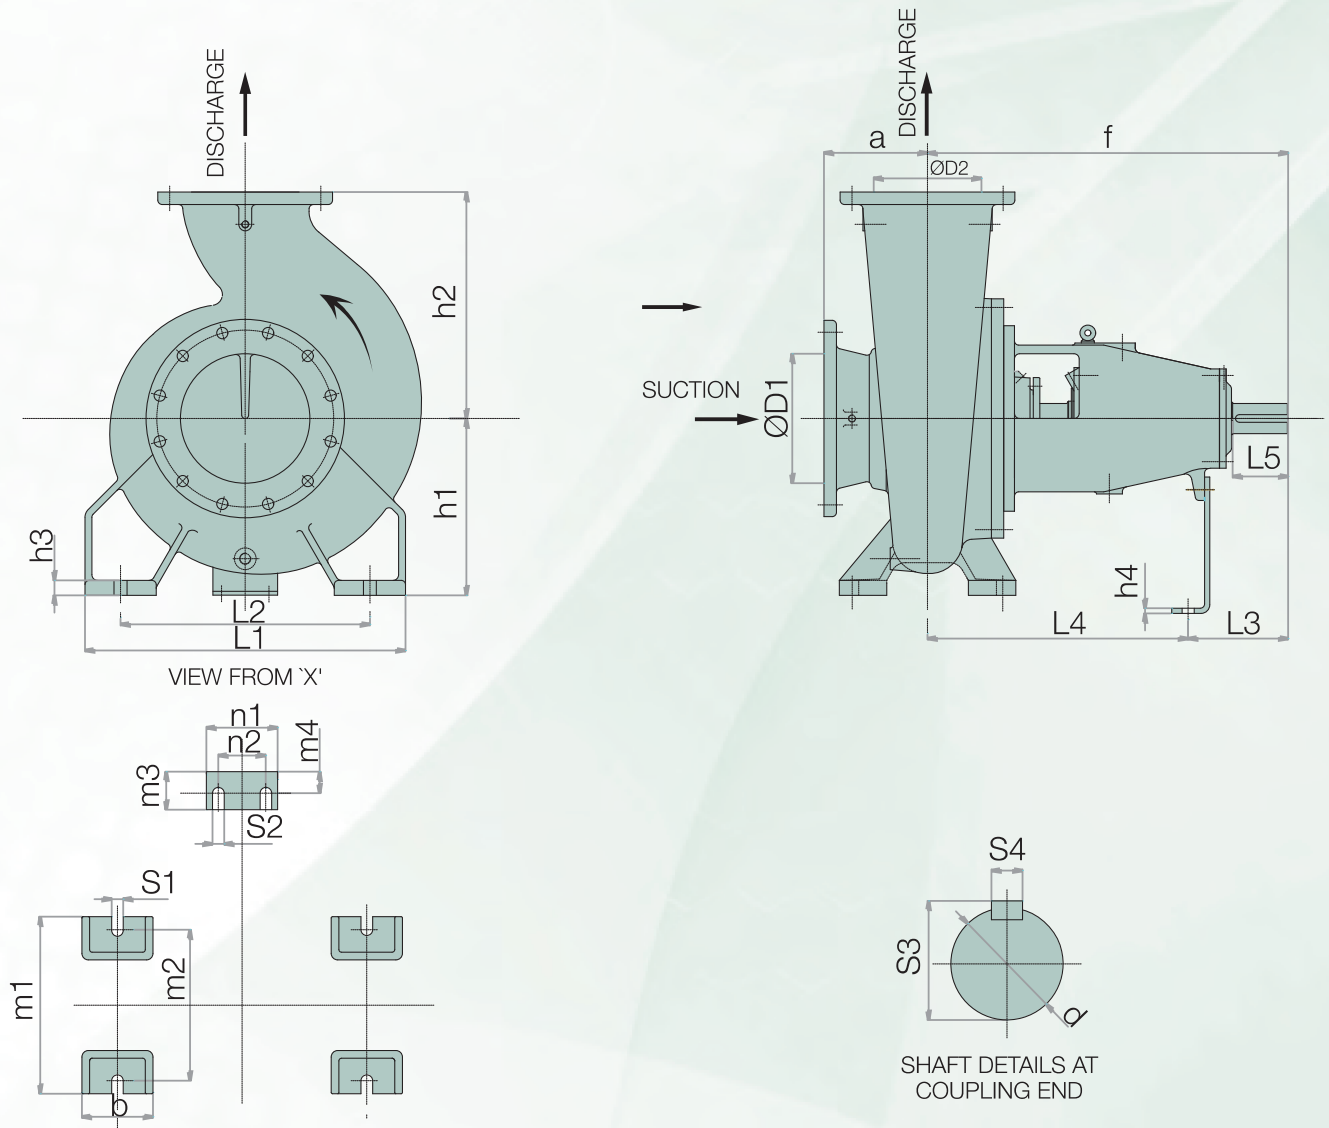

ESL PUMP DIMENSIONS

Sl. No	Pump Model	Size		Shaft	Pump Dimensions				Mounting Dimensions																Shaft Dimensions				Weight (kg)
		D1	D2	Group	a	f	h1	h2	b	h3	h4	m4	m1	m2	m3	L1	L2	n1	n2	s1	s2	L3	L4	d	L5	s3	s4		
1	ESL 150-450	200	150	ES-4	230	670	375	480	100	28	6	34.5	200	150	66	616	520	150	110	22	20	181	490	48	108.5	51.8	14	440	
2	ESL 150-500	200	150	ES-4	160	670	400	500	120	24	9	34.5	200	150	66	525	450	150	110	22	20	180.5	500	48	110	51.8	14	460	
3	ESL 200-260	200	200	ES-4	245	757.5	300	375	140	20	12	34.5	400	340	65	650	510	150	110	22	20	212	545	48	110	51.8	14	305	
4	ESL 200-315	250	200	ES-4	180	679	315	450	140	20	9	36.5	350	300	65	575	525	150	110	22	22	170	509	48	110	51.5	14	335	
5	ESL 200-400	250	200	ES-4	180	675	400	400	150	20	9	36.5	300	230	65	500	370	150	110	22	22	200	475	48	140	51.5	14	350	
6	ESL 200-450	250	200	ES-4	160	675	350	450	150	20	6	36.5	200	150	65	550	450	150	110	22	22	200	500	48	140	51.8	14	450	
7	ESL 200-500	250	200	ES-5	180	794	435	500	165	35	12	50	340	280	88	743	578	165	110	27	27	232	588	70	129	73.9	18	670	
8	ESL 200-550	250	200	ES-5	233.5	794	450	600	165	35	10	50	340	280	88	743	578	165	110	27	27	232	588	70	129	73.9	18	770	
9	ESL 200-675	250	200	ES-5	250	900	500	670	165	28	12	50	410	350	88	764	600	165	110	27	27	232	680	70	129	73.9	18	920	
10	ESL 250-260	250	250	ES-4	250	727	350	450	165	20	12	36.5	400	340	65	650	510	150	110	22	22	181.5	545.5	48	110	51.8	14	375	
11	ESL 250-315	300	250	ES-4	290	780	340	455	165	20	12	36.5	400	340	65	650	510	150	110	22	22	212	568	48	140	51.8	14	425	
12	ESL 250-355	300	250	ES-4	250	662	350	450	165	20	12	36.5	310	250	65	650	510	150	110	22	22	181.5	480	48	110	51.8	14	385	
13	ESL 250-400	300	250	ES-5	240	836	410	525	165	35	12	50	410	350	88	745	580	165	110	27	27	232	604	70	129	73.9	18	785	
14	ESL 250-500	300	250	ES-5	275	834.5	452.5	600	165	28	12	50	410	350	88	765	600	165	110	27	27	232	602.5	70	129	73.9	18	800	
15	ESL 250-600	350	250	ES-5	250	809.5	497.5	650	165	28	12	50	410	350	88	764	600.5	165	110	27	27	232	577.5	70	129	73.9	18	850	
16	ESL 250-650	300	250	ES-5	280	840	500	750	165	28	12	50	410	350	88	764	600	165	110	27	27	232	600	70	129	73.9	18	900	
17	ESL 300-315	300	300	ES-4	240	670	350	400	165	20	9	36.5	400	340	65	650	510	150	110	22	22	170	500	48	110	51.8	14	365	
18	ESL 300-400	350	300	ES-5	280	846	410	550	165	28	12	50	410	350	88	764	600	165	110	27	27	232	614	70	129	73.9	18	830	
19	ESL 300-450	350	300	ES-5	280	846	410	550	165	28	12	50	410	350	88	764	600	165	110	27	27	232	614	70	129	73.9	18	860	
20	ESL 300-550	350	300	ES-5	280	846	470	650	165	28	12	50	410	350	88	764	600	165	110	27	27	232	614	70	129	73.9	18	950	
21	ESL 300-575	350	300	ES-5	280	846	530	750	165	28	12	50	410	350	88	764	600	165	110	27	27	232	614	70	129	73.9	18	975	
22	ESL 300-600	350	300	ES-5	300	846	530	840	165	28	12	50	410	350	88	764	600	165	110	27	27	232	614	70	129	73.9	18	1000	
23	ESL 300-665	350	300	ES-5	380	796	583.5	780	165	42	12	50	386.5	450.5	88	892	694	165	110	27	27	232	563.5	70	129	73.9	18	1250	
24	ESL 350-350	350	350	ES-5	280	830	470	560	165	35	12	50	400	340	88	765	600	165	110	27	27	215	615	70	129	73.9	18	700	
25	ESL 350-550	450	350	ES-5	300	830	470	650	165	28	12	50	410	350	88	765	600	165	110	27	27	232	615	70	129	73.9	18	800	
26	ESL 350-650	400	350	ES-5	300	846	580	780	165	28	12	50	410	350	88	765	600	165	110	27	27	232	615	70	129	73.9	18	900	
27	ESL 400-400A	400	400	ES-5	350	850.5	450	600	165	35	12	50	409	349	88	743	578	165	110	27	27	232.5	617.5	70	129	73.9	20	850	
28	ESL 400-400B	400	400	ES-5	420	888	540	720	198	35	10	43	491	419	88	892	694	165	110	32.5	27	246.5	640.5	70	203.5	73.9	20	900	
29	ESL 400-450	400	400	ES-5	420	888.5	540	720	198	42	12	50	491	419	88	892	694	165	110	32.5	27	232.5	655.5	70	129	73.9	20	1000	
30	ESL 400-500	450	400	ES-5	385	833	575	750	198	42	12	50	491	420	88	890	694	165	110	36	27	232.5	600	70	129	73.9	22	1350	
31	ESL 400-550	450	400	ES-5	390	900	575	750	198	42	12	50	491	419	88	892	694	165	110	36	27	232.5	650	70	129	73.9	22	1450	

Note :
All dimensions are in mm
Dimensions are for reference only and may differ from those of actual construction.



FLO-MASTER
PUMPS AUSTRALIA

SHAFT SEALING

The pumps are offered with two basic versions:


- a) Packed Gland
- b) Mechanical Seal

Packed Gland Pumps- Usually five packing rings are used with two rings towards the impeller end and three rings towards the gland end with a lantern ring interposed between two sets of packings. The packings are mounted on renewable shaft sleeves. Shaft packing are offered in variety of materials depending on the characteristics of the liquid handled.


Mechanical Seal fitted Pumps- These are offered with

- a) Single unbalanced seal
- b) Single balanced seal

The selection of mechanical seal is done based on the pump application and a very large variety of seal options are available. Double mechanical seals can be supplied on request. Additionally, variety of seal piping as per API 684 are offered for special applications.

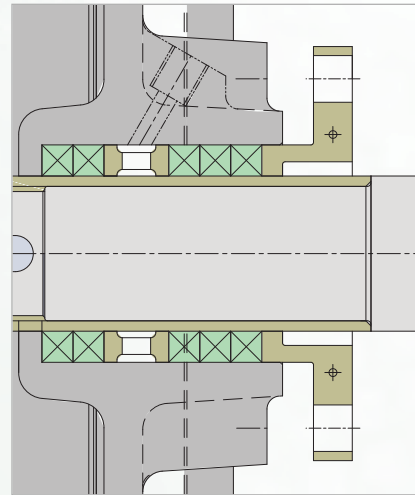

Shaft seal: Gland Pack

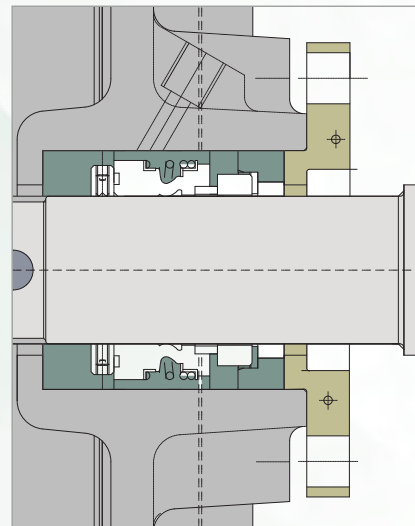

Shaft Seal: Single acting mechanical seal


Acceptance Tests

Acceptance test & QA documentation

The following QA documents are available on request for all pumps:

- 1) Mill Test report for casing and impeller – Physical / Chemical Certificate.
- 2) Ultrasonic Test (ASTM-A-388) for shafts
- 3) Dynamic Balancing report for impeller – ISO 1940 Gr.6.3
- 4) Hydrostatic Pressure test certificate
- 5) Performance test certificate as per ISO 9906/2012
- 6) Dimensional Compliance report.

Torque-Speed Curve

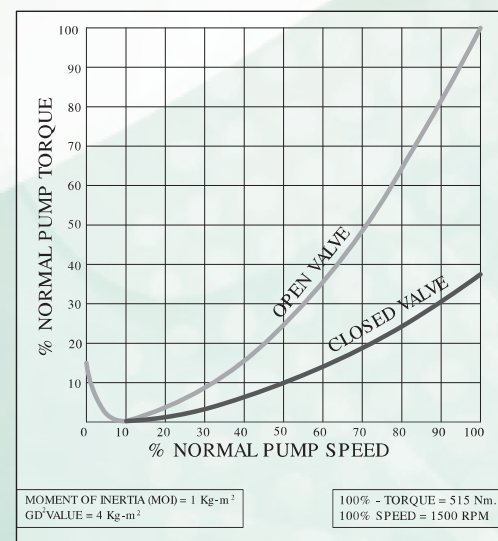

The above speed-torque characteristics shows the variation of torque with speed during pump start up. The curve can be used to estimate the starting time of the electric motor.



FLO-MASTER
PUMPS AUSTRALIA

A. PUMP FRAME

PUMP MODEL	Unit	ESL 250-650	ESL 300-315	ESL 300-400	ESL 300-450	ESL 300-550	ESL 300-575	ESL 300-600	ESL 300-665	ESL 350-350	ESL 350-550	ESL 350-650	ESL 400-400A	ESL 400-400B	ESL 400-450	ESL 400-500	ESL 400-550
1. Discharge size	mm	250	300	300	300	300	300	300	300	350	350	350	400	400	400	400	400
2. Suction size	mm	300	300	350	350	350	350	350	350	350	450	400	400	400	400	450	450
3. Flange rating	Suction	PN25	PN16	PN16	PN16	PN16	PN25	PN25	PN25	PN16	PN16	PN25	PN16	PN16	PN16	PN16	PN16
	Delivery	PN25	PN16	PN16	PN16	PN16	PN25	PN25	PN25	PN16	PN16	PN25	PN16	PN16	PN16	PN16	PN16
4. Casing Material	BS 1452 Gr. FG 260 as standard. Other grades depending on application.																
5. Casing Thickness	mm	26	12	18	24	24	25	25	27	16	19	26	14	14	17	16	16
6. Discharge nozzle	Center Line Discharge																
7. Cut Water Clearance	mm	23	16.5	13.5	15.5	19.5	20.8	21	23.5	17	19	23.2	12.5	14.4	24.5	19	20
8. Casing Volute Type	mm	Double	Single	Single	Single	Double	Double	Double	Double	Single	Double	Double	Single	Single	Single	Single	Double

B. IMPELLER AND ROTOR

1. Maxm Impeller Diameter	mm	660	296.5	390	445	555	595	600	665	322.5	540	662	384	410	461	540	556
2. Specific Speed	rpm	976	5568	3204	2266	1791	1220	1696	1418	5774	2372	1306	4218	3985	4606	3095	2212
3. Impeller Type		Radial	Mixed	Francis	Francis	Francis	Radial	Francis	Radial	Mixed	Francis	Radial	Mixed	Mixed	Mixed	Francis	Francis
4. No. of vanes		6	3	6	6	6	6	6	6	3	6	6	3	5	3	6	6
5. Wear Ring clearance dia (max.)	mm	0.382	0.382	0.387	0.387	0.382	0.382	0.382	0.507	0.376	0.382	0.382	0.382	0.43	0.482	0.507	0.507
Wear Ring clearance dia.(min.)	mm	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.43	0.31	0.31	0.31	0.31	0.43	0.43	0.43	0.43
6. ID of Casing wear ring	mm	330	276	324	315	315	315	321	352	300	310	320	310	335	375	430	430
7. Impeller Eye Diameter	mm	300	253	290	290	278	289	298	312	275.5	280	298	286	310	343	388	390
8. GD $\wedge$ 2 for Maximum Diameter	Kg.m ²	8.9	2.8	2.8	4.1	8.1	8.7	9.8	11.2	3.1	5	7.5	8.1	8.2	8.6	9.2	12

C. SHAFT AND BEARINGS

1. Shaft diameter at Impeller	mm	64	48	64	64	64	64	64	64	64	64	64	64	64	64	64	64
2. Shaft diameter at coupling	mm	70	48	70	70	70	70	70	70	70	70	70	70	70	70	70	70
3. Bearing Centres	mm	226.5	205	226.5	226.5	226.5	226.5	226.5	226.5	226.5	226.5	226.5	226.5	226.5	226.5	226.5	226.5
5. Bearing size drive end		2XBECB 7316	2XBECB 7313	2XBECB 7316	2XBECB 7316	2XBECB 7316	2XBECB 7316	2XBECB 7316	2XBECB 7316	2XBECB 7316	2XBECB 7316	2XBECB 7316	2XBECB 7316	2XBECB 7316	2XBECB 7316	2XBECB 7316	2XBECB 7316
6. Bearing size non-drive end		NU 316	NU 313	NU 316	NU 316	NU 316	NU 316	NU 316	NU 316	NU 316	NU 316	NU 316	NU 316	NU 316	NU 316	NU 316	NU 316
7. Bearing Life	Above 60,000 hrs																
6. Bearing Lubrication	Grease Lubrication as standard. Oil on request																

D. STUFFING BOX

1. Inside Diameter	mm	110	85	110	110	110	110	110	110	110	110	110	110	110	110	110	110
2. Depth of Box	mm	114	93	114	114	114	114	114	114	114	114	114	114	114	114	114	114
3. Size of Packing	mm Sq.	16 x 16	12 x 12	16 x 16	16 x 16	16 x 16	16 x 16	16 x 16	16 x 16	16 x 16	16 x 16	16 x 16	16 x 16	16 x 16	16 x 16	16 x 16	16 x 16
4. No. of rings per Box		5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
5. Sleeve Diameter at Box	mm	77	60	77	77	77	77	77	77	77	77	77	77	77	77	77	77
6. Shaft diameter at mechanical seal	mm	70	53	70	70	70	70	70	70	70	70	70	70	70	70	70	70
7. Mech. Seal Size(AES or equivalent)	mm	70	53	70	70	70	70	70	70	70	70	70	70	70	70	70	70

E. SERVICE LIMITS

1. Maxm working pressure	Bar	25	16	16	16	16	20	20	25	16	16	25	16	16	16	16	16
2. Maxm Hydrotest pressure	Bar	37.5	24	24	24	24	30	30	37.5	24	24	37.5	24	24	24	24	24
3. Maxm Suction pressure	Bar	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
4. Maxm Temp packing	⁰ degC	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80
5. Max Temp Mech seal	⁰ degC	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80
6. Maxm Speed	RPM	1800	1800	1800	1800	1800	1800	1800	1800	1500	1800	1800	1500	1500	1500	1500	1500

EMTIVAC Engineering Pty. Ltd.
ABN 89 080 463 556

Factory and Head Office:
170-174 Discovery Road,
Dandenong South VIC 3175
Telephone: 03 9768 3240
Facsimile: 03 9768 3250

New South Wales Office:
Peakhurst NSW 2210
Telephone: 1300 791 199

QLD Office:
Telephone: 1300 791 199

sales@emtivac.com
www.emtivac.com.au



EMTIVAC
VACUUM PUMP & SYSTEM ENGINEERS



FLO-MASTER
PUMPS AUSTRALIA